


NOTES:

1. Pile shall be placed against undisturbed material.
2. Primer and paint post interior from base plate to 6" above lower handhole-unless post is galvanized.
3. On single post sign structures, the post shall be raked out of plumb, with the use of leveling nuts to make the bottom of the sign frame level.
4. When foundation is located on a steep slope with exposed face of concrete adjacent to traffic, see "DETAIL J".
5. Slope protection required when indicated on Project Plans.
6. For drain holes and central void in mortar, see Standard Plan ES-6B detail N.

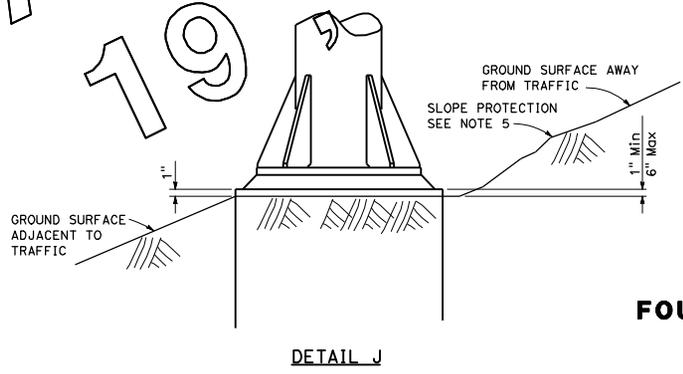

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**OVERHEAD SIGN-TRUSS
SINGLE POST TYPE
FOUNDATION AND MISCELLANEOUS DETAILS
CHANGEABLE MESSAGE SIGNS
MODEL 510**
NO SCALE

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET NO.	TOTAL SHEETS

Stanley P. Johnson
REGISTERED CIVIL ENGINEER

May 20, 2011
PLANS APPROVAL DATE

Stanley P. Johnson
No. CS793
Exp. 3-31-12
CIVIL
STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.