

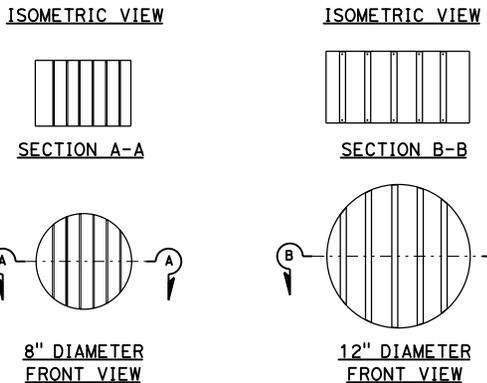
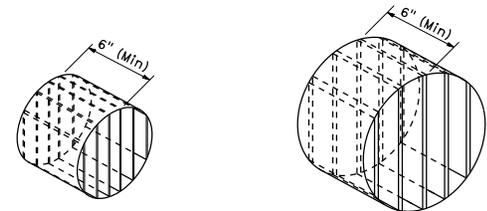


VISORS

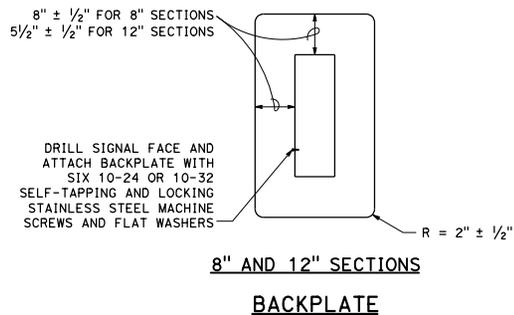


DIRECTIONAL LOUVER

Directional louvers shall be oriented and secured in place with one plated brass machine screw and nut.

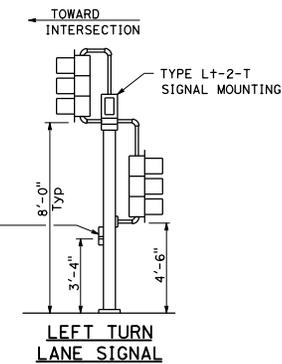

Type 1-A, 1-B, 1-C and 1-D standard as indicated on plans



SIGNAL FACES

STATE OF CALIFORNIA
 DEPARTMENT OF TRANSPORTATION

**ELECTRICAL SYSTEMS
 (SIGNAL HEADS AND MOUNTINGS)**

NO SCALE

RSP ES-4C DATED OCTOBER 30, 2015 SUPERSEDES RSP ES-4C DATED JULY 19, 2013 AND STANDARD PLAN ES-4C DATED MAY 20, 2011 - PAGE 445 OF THE STANDARD PLANS BOOK DATED 2010.

REVISED STANDARD PLAN RSP ES-4C

DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET TOTAL SHEETS


Theresa Gabriel
 REGISTERED ELECTRICAL ENGINEER

October 30, 2015
 PLANS APPROVAL DATE

Theresa Aziz Gabriel
 No. E15129
 Exp. 6-30-16
 REGISTERED PROFESSIONAL ENGINEER
 ELECTRICAL
 STATE OF CALIFORNIA

THE STATE OF CALIFORNIA OR ITS OFFICERS OR AGENTS SHALL NOT BE RESPONSIBLE FOR THE ACCURACY OR COMPLETENESS OF SCANNED COPIES OF THIS PLAN SHEET.

TO ACCOMPANY PLANS DATED _____

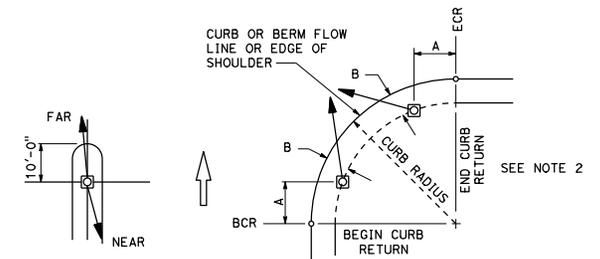

NOTES:

1. Typical signal pole placement unless dimensioned on plans.
2. For A and B dimensions, see Pole Schedule.

SIGNAL STANDARD PLACEMENT DIMENSIONS AND EQUIPMENT LOCATIONS

TYPICAL SIGNAL HEAD INSTALLATIONS

TOP MOUNTED SIGNALS (TV)

Type 1-A, 1-B, 1-C and 1-D standard as indicated on the plans

SIDE MOUNTED SIGNALS (SV AND SP)

Normally used on standards with luminaire or signal mast arm

2010 REVISED STANDARD PLAN RSP ES-4C