


DIST	COUNTY	ROUTE	POST MILES TOTAL PROJECT	SHEET No.	TOTAL SHEETS


REGISTERED CIVIL ENGINEER
 Jeffrey B. Boody
 No. C41260
 Exp. 3-31-17
 CIVIL
 STATE OF CALIFORNIA

October 30, 2015
 PLANS APPROVAL DATE
 THE STATE OF CALIFORNIA OR ITS OFFICERS
 OR AGENTS SHALL NOT BE RESPONSIBLE FOR
 THE ACCURACY OR COMPLETENESS OF SCANNED
 COPIES OF THIS PLAN SHEET.


TO ACCOMPANY PLANS DATED _____

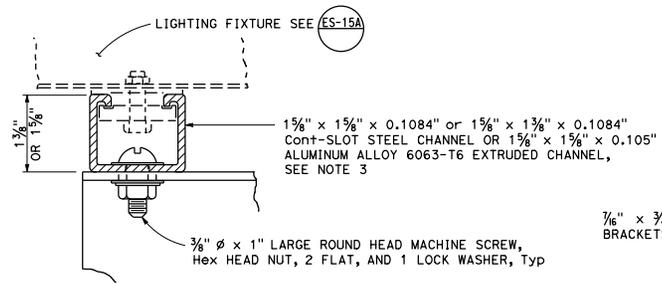


LIGHTING FIXTURE MOUNTING CHANNEL DETAILS 1

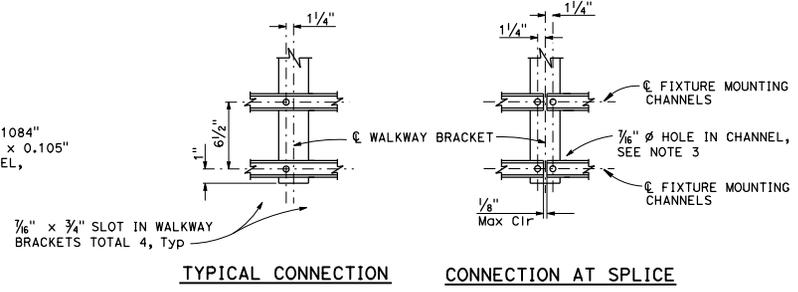


LIGHTING FIXTURE MOUNTING CHANNEL DETAILS 2

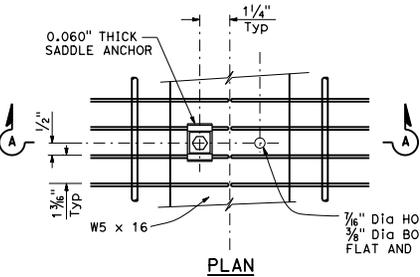

**SECTION A-A
WALKWAY GRATING DETAILS**
Shown at splice

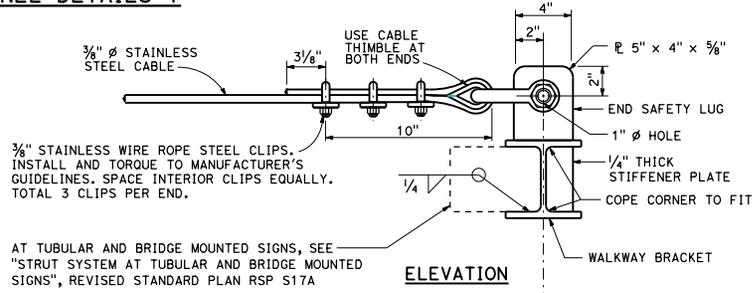

ELEVATION

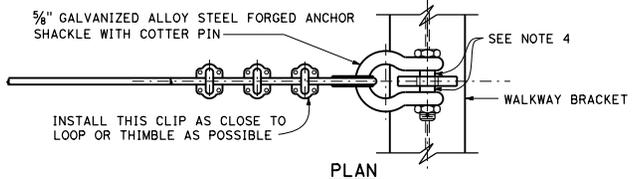


PLAN


END SAFETY CABLE DETAIL

NOTES:

1. Welded type grating shall have 1/4" x 1/8" bearing bars at 1 3/8" centers with 1/4" diameter (or equal) cross bars at 4" centers. If mechanical lock grating is used, it shall be equal in strength to the welded type. Alternate hold-down clips may be submitted for approval.
2. Walkway grating and light fixture mounting channels to be continuous (no splices) over as many walkway brackets as practical and consistent with fabrication, ease of handling and assembly.
3. Contractor may substitute 1 5/8" x 1 5/8" x .1084" cont-slot steel channel with pre-punched slots not larger than 1/2" x 3". Slots shall be at bottom of channel and shall be parallel to channel. Slots shall be spaced not closer than 4" center to center.
4. Place an equal amount of washers on each side to align cable with end lug without restricting shackle bolt rotation or contacting cable.

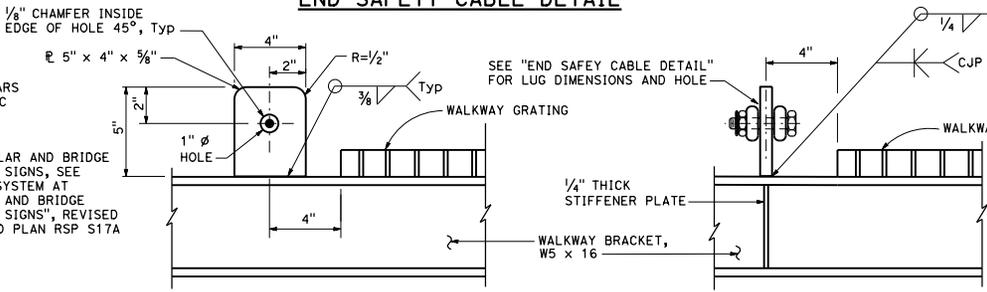

INTERIOR SAFETY LUG DETAIL
(At every walkway bracket between exterior walkway brackets)

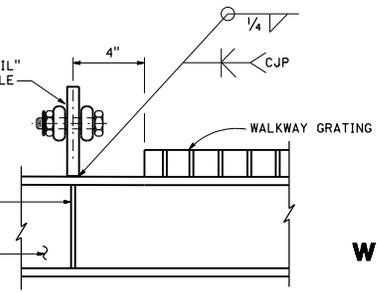

END SAFETY LUG DETAIL
(At exterior walkway brackets)

STATE OF CALIFORNIA
DEPARTMENT OF TRANSPORTATION
**OVERHEAD SIGNS
WALKWAY DETAILS No. 2**

NO SCALE
RSP S17 DATED OCTOBER 30, 2015 SUPERSEDES
STANDARD PLAN S17 DATED MAY 20, 2011 -
PAGE 350 OF THE STANDARD PLANS BOOK DATED 2010.

REVISED STANDARD PLAN RSP S17

2010 REVISED STANDARD PLAN RSP S17